

BEST AVAILABLE COPY

FILED 10/05/04

GB04/03876



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D	05 OCT 2004
WIPO	PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

*Andrew Gersey*

Dated 27 September 2004

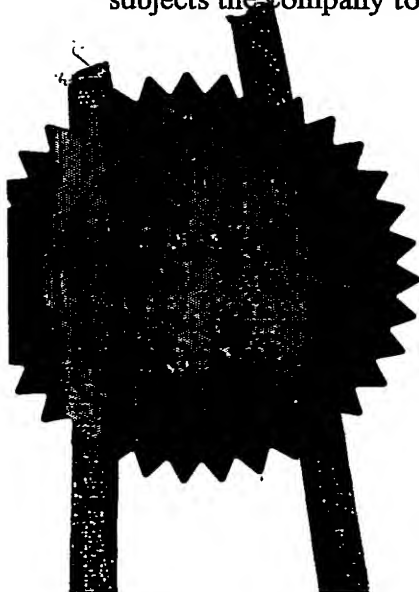

15 SEP 2003



1/77  
16 SEP 2003 08:37:24-8 D02 29  
P0177700 0.00-0321579.5

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference	<del>AHW/L45531 GB</del> m038154/ASB		
2. Patent application number (The Patent Office will fill this part in)	0321579.5		
3. Full name, address and postcode of the or of each applicant ( <i>underline all surnames</i> )	The BOC Group plc Chertsey Road Windlesham Surrey GU20 6HJ United Kingdom  Patents ADP number ( <i>if you know it</i> ) 00884627002  If the applicant is a corporate body, give the country/state of its incorporation England		
4. Title of the invention	TREATMENT OF AQUEOUS CHEMICAL WASTE		
5. Name of your agent ( <i>if you have one</i> )	<del>RGC Jenkins &amp; Co.</del> The BOC Group plc as above FS1/77 ES 12/1/04.		
"Address for service" in the United Kingdom to which all correspondence should be sent ( <i>including the postcode</i> )  Patents ADP number ( <i>if you know it</i> )	26 Caxton Street London SW1H 0RJ United Kingdom 03966736001 ✓		
6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute ( <i>see note f</i> )	Number of earlier UK application		Date of filing (day / month / year)
8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. Otherwise answer NO ( <i>See note d</i> )	YES		

**Patents Form 1/77**

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 14 ✓

Claim(s) 4 ✓

Abstract

Drawing(s) 2 + 2 JML

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)  R.G.C. JENKINS & CO Date 15 September, 2003

12. Name, daytime telephone number and e-mail address of person to contact in the United Kingdom A. H. West 020-7931-7141

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier application, you should also complete part 6 with the priority details.

DUPLICATE

### TREATMENT OF AQUEOUS CHEMICAL WASTE

This invention relates to the treatment of toxic and/or environmentally hazardous or harmful materials and more especially to the treatment of aqueous solutions of hazardous waste arising from various chemical processes.

The chemical processing industry in general generates vast quantities of by-products and waste materials many of which represent environmental hazards and which must be neutralised or destroyed as an essential part of their ultimate disposal. The oil and gas processing industries, for example, invest heavily in plant and equipment designed specifically to prevent or minimise the release of harmful largely organic materials into the environment. The microelectronics and semi-conductor device manufacturing industries, for example, make similar investments in order to scrub or otherwise treat exhaust gas streams containing generally inorganic materials from chemical processing units prior to the release of those exhaust gases into the atmosphere. Compounds containing heavy metals and halogen-, sulphur-, phosphorus- and nitrogen-containing compounds can be especially toxic and their removal is the subject of a considerable amount of technical research and of much environmental protection legislation.

Many of the procedures utilised in the microelectronics and semi-conductor device manufacturing industries use fluorine-containing compounds. Unused fluorine-containing compounds and fluorine-containing products and by-products are generally discharged from the process or from a

subsequent exhaust treatment, for example scrubbers and other adsorption systems, as an aqueous waste stream. This aqueous waste stream will generally contain fluorine in the form of HF. However, cationic species such as  $\text{NH}_4^+$  may also be present, in addition to fluoride in the form of bifluoride ions,  $\text{HF}_2^-$ .

Current practise in such manufacturing and disposal facilities involves treating the aqueous fluoride stream with magnesium or calcium salts in order to precipitate the sparingly soluble  $\text{MgF}_2$  and  $\text{CaF}_2$ , usually the latter. The solid material can then be compacted and dried for ease of transport for disposal or further use. However, the water stream will still have a fluoride content of some 20 to 30 ppm which continues to present a disposal problem with discharge limits of 3 ppm being more generally imposed.

Further, some legislative areas prohibit the dilution of certain waste streams (for example, aqueous fluoride with an aqueous stream containing no fluoride) for disposal purposes and in other areas allowable discharge is based on the quantity of discharged species and not their concentrations. The safe disposal of hazardous and harmful materials therefore presents ever increasing problems.

A further difficulty is that effluent from recently developed procedures which use a mixture of ammonium bifluoride and HF cannot be accommodated in a calcium precipitation installation because  $\text{CaF}_2$  will not form at pH below 12 and such high pH values favour the dissociation of ammonium species to produce ammonia gas. Additional facilities are then

required to remove and separate  $\text{NH}_4^+$  and  $\text{F}^-$  before they can be treated to form solid waste. This can be achieved using traditional ion exchange techniques but the plant will be large in that it will require separate beds for the two ion exchange species and duplex systems with further chemical feeds  
5 for their periodic regeneration.

A recently developed system that is capable of removing both anionic and cationic species from aqueous solutions without requiring further chemical additives makes use of a technique known as electrochemical deionisation which involves ion exchange and electrolytic separation  
10 technologies. In this system cations or anions of interest are adsorbed from dilute aqueous solution onto an ion exchange medium, transported through that medium by an applied electric field and continuously eluted as a concentrated stream. Such a procedure is described in EP 0680932B. There are many examples within the existing literature of electrochemical cells that  
15 combine adsorption and ion separation and EP 0680932B illustrates one such ion removal/separation/concentration process. Other approaches will be known to those skilled in the art and can also be used. Such systems have been applied with some success on a continuous basis to minimise water consumption and to concentrate anions or cations for ease of subsequent  
20 handling in our copending Patent Application No. GB 0300793.7. That application demonstrates especially that fluoride ions can be concentrated and removed from a closed loop circulation system.

Further work has now revealed that the techniques and procedures

described in GB 0300793.7 may be applied successfully to the problems described above. In this respect the structure of the electrochemical deionisation cell described and illustrated in GB 0300793.7 has been modified to permit the simultaneous removal of both anions and cations.

5 In accordance with the invention, there is now provided a method for the treatment of aqueous streams containing both anionic and cationic species, the method comprising the steps of:

continuously circulating water through an essentially closed loop incorporating an ion adsorption unit comprising a water permeable layer of an  
10 ion adsorbing material;

feeding to the essentially closed loop an aqueous solution containing the anionic and the cationic species;

continuously passing the circulating water including the aqueous solution containing the an ionic and the cationic species through the ion  
15 adsorbing material in the ion adsorption unit while applying an electric potential across the thickness of the layer of ion adsorbing material and removing from the ion adsorption unit more concentrated aqueous solutions of the separate ionic species;

continuously discharging from the ion adsorption unit the more  
20 concentrated aqueous solution of one ionic species;

continuously discharging from the ion adsorption unit the aqueous solution depleted in anionic and cationic species;

continuously passing the more concentrated solution of the other ionic

species through a reaction unit in which the ionic species reacts to form a water-insoluble solid material;

continuously recycling the eluate from the reaction unit to the ion adsorption unit; and, if necessary,

- 5           adding to the closed loop a quantity of water corresponding the quantity of aqueous solution removed from the closed loop with the solids in the reaction unit.

In a separate aspect, the invention provides also apparatus for use in carrying out the method described above, the apparatus comprising:

- 10           an essentially closed loop circulation system containing (i) an ion adsorption unit comprising a water permeable zone of an ion adsorbing material and means for enabling an electrical potential to be applied across the thickness of the ion adsorbing zone and (ii) a reaction unit in which one of the anionic and cationic species is rendered substantially insoluble;
- 15           a pump for continuously circulating aqueous solution around the closed loop;
- an inlet for an aqueous solution containing anionic and cationic species to the closed loop circulation system;
- an outlet for concentrated aqueous solution of one ionic species from
- 20           the ion adsorption unit;
- an outlet for depleted aqueous solution from the ion adsorption unit;
- an outlet for solid from the reaction unit; and
- an inlet for water into the closed loop circulation system.



The ion adsorption unit employed as an essential aspect of the method and apparatus of the invention preferably incorporates both anion adsorbing and cation adsorbing capabilities in the unit. However, if necessary or desirable, it may be advantageous to use two separate ion adsorption units disposed in series one for anion adsorption and the other for cation adsorption. Still further, an ion adsorption unit having both anion adsorbing and cation adsorbing capabilities may be supplemented by a series-connected ion adsorption unit having only an anion adsorbing or a cation adsorbing capability. The precise arrangement will depend upon the relative concentrations of the anionic and cationic species in the aqueous solution fed to the ion adsorption units, the efficiency of the ion adsorption units in removing anions and/or cations of interest from the aqueous solution and the residual concentrations of the anions and the cations in the depleted aqueous solution having regard to any further treatment to which that solution may be subjected. In general terms, however, the skilled person will have no special difficulty in selecting the most appropriate combination of ion adsorption units and ion adsorbing materials for the particular situation and circumstances.

The ion adsorbing materials serve to capture the ions of interest and are preferably ion exchange materials such as ion exchange resins in the form of particles or beads or other materials that can provide:

a solution permeable medium;

an ion adsorption medium (to remove the anions or cations);

an ion conducting medium whereby the ions may be moved by the imposed electrical field into a separate solution.

The particles or beads of the resins are preferably in a coherent form, that is to say they are not mobile or loose but are constrained in a predetermined configuration. For example, the particles of beads may be bound together with a binder or held between layers of a mesh or membrane so as to be permeable to the aqueous solution containing the ions, the mesh or membrane being permeable as appropriate for the removal and concentration of the ions of interest. The electrical potential which is applied across the thickness of the layer of ion adsorbing material serves to drive the captured ions through the ion adsorbing material towards one or other of the electrodes through which the potential is applied. The electrical potential may be generated from a pair of electrodes arranged to form an electrolysis cell or by any alternative arrangement, for example in the form of an electrophoresis cell.

It will be understood that the ion adsorption unit consisting of ion exchange material is, in operation, self-regenerating in that it effectively transports the captured cations and/or anions through its bulk for discharge as a concentrated aqueous solution, and will regenerate to its hydrogen or hydroxide form when no other cationic or anionic species is present. Such an electrically regenerating ion exchange unit is referred to hereinafter as an ERIX unit for the sake of brevity. Such units may comprise many ion removal and concentration channels in parallel and will be known to those

skilled in the art.

It has been found that using the method and apparatus according to the invention it is possible to effect continuous separation of anions and cations with a closed loop circulation system without any need for regenerating or periodically replacing the ion adsorbing materials. The efficiency of the method and apparatus will depend upon the nature of the ion adsorbing materials and of the ions to be captured, the concentration of the ions in the solution and other factors such as flow rates and electrical potentials but initial indications are that ion extraction rates of up to 98% per pass can be achieved.

With such high extraction rates, the removal of acid anions such as  $F^-$  as well as  $SO_4^{2-}$  and  $NO_3^-$  will have a dramatic effect upon improving the service life of the equipment in the circulating system, such as pumps, meters, valves and baffles.

The method of the invention is applicable to a wide variety of anionic species such as sulphate, sulphite, nitrate, nitrite, phosphate, phosphite and halides, that is to say fluoride, chloride, bromide and iodide as well as cationic species especially metals and more especially heavy metals.

The invention does, however, have particular applicability to fluoride such as that generated as a by-product of the semi-conductor device manufacturing industry and which produces aqueous hydrofluoric acid as a result of reaction followed by dissolution in a gas scrubbing plant. The invention is most especially useful for aqueous solutions containing both

fluoride and ammonium ions which have been difficult to separate in a satisfactory manner by more traditional techniques, as described above.

In its preferred aspect, therefore, the invention permits the separation of ammonium and fluoride ions from aqueous solution using an electrically  
5 regenerating ion exchange (ERIX) system. By incorporating the ERIX unit into a recirculation loop, the concentrated fluoride solution can be passed through a calcium precipitation unit thereby capturing fluoride in solid form. The eluate from the precipitation unit can then be recycled to the ERIX unit in combination with additional waste water feed.

10 In this manner, fluoride is safely and efficiently removed from the waste water as solid  $\text{CaF}_2$ , ammonium ions are separated and discharged and purified water is obtained.

In an especially preferred method, the amount of calcium admitted to the precipitation unit is significantly less than that required by stoichiometric  
15 considerations for capturing all of the fluoride ions in the concentrated stream discharged from the ERIX unit. In this way, the fluoride ion concentration in the effluent from the precipitation unit can be maintained at a level such that the concentration of calcium in that effluent is extremely low. This in turn helps to safeguard the ERIX unit which could rapidly become clogged, or at  
20 least severely contaminated, by solid calcium deposits derived from soluble calcium in the effluent.

The calcium that is fed to the precipitation unit for the formation of  $\text{CaF}_2$  is preferably in soluble form but simple economic considerations may

demand the use of calcium in an insoluble or sparingly soluble form. For example, calcium hydroxide slurries and calcium carbonate slurries may be used with advantage. However, a considerable quantity of water will be required to form such slurries and it may therefore be advantageous to use at least some of the treated water exiting the ERIX unit for this purpose. In this manner there is little or no necessity to introduce fresh water into the loop.

In an alternative arrangement, fluoride-containing eluent from the precipitation unit may be recycled for the purpose of forming the calcium slurry. This alternative has the advantage of consuming some of the fluoride exiting the precipitation unit and thereby reducing the fluoride burden on the ERIX unit.

The invention is described below in greater detail by way of example only with reference to the accompanying drawings, in which:

Fig. 1 is a schematic representation of a closed loop circulation treatment apparatus according to the invention;

Fig. 2 is a schematic representation of a preferred form of closed loop circulation treatment apparatus according to the invention;

Fig. 3 is a schematic representation of a further form of closed loop circulation treatment apparatus according to the invention; and

Fig. 4 is a schematic representation of an example of an electrochemical cell which may be used in the apparatus shown in Figs. 1, 2 and 3.

Referring to the drawings, in Fig. 1 there is shown a schematic representation of apparatus according to the invention. An aqueous ion

containing solution containing fluoride and ammonium ions is admitted into an ion adsorption unit 3 (ERIX unit) forming part of a closed loop circulation system 1, via line 2. Within the ERIX unit 3 (an example of which is described in detail by reference to Fig. 4 of the drawings) the aqueous solution is treated and separated to form a concentrated ammonium solution which is discharged through line 4, a concentrated fluoride solution which is discharged through line 6 and a depleted aqueous solution which is discharged through line 5.

The line 6 containing the concentrated fluoride solution forms part of the closed loop circulation system 1 and leads to a circulation pump (not shown) for maintaining circulating flow within the loop. A separate line may be provided for make-up water, if required, although such make-up water can be admitted at almost any part of the loop system 1.

Downstream of the pump there is a precipitation unit 9 containing a suitable source of calcium (preferably in soluble form) which reacts with the fluoride solution to form insoluble  $\text{CaF}_2$ . Such precipitation units are well known to those skilled in the art and do not require detailed description here. Precipitated  $\text{CaF}_2$  is removed through line 7.

The eluate from the precipitation unit 9 contains only 20 to 30 ppm F and passes by way of line 8 to the line 2 through which fresh fluoride/ammonium solution enters the system. If desired, some of the fluoride containing eluate in line 8 may be admitted to the fluoride concentrate side of the ERIX unit 3 via line 10.

A modified and preferred form of apparatus is represented schematically in Fig. 2. That apparatus is similar in most respects to that shown in Fig. 1 except that some of the water exiting the ERIX unit through line 5 is taken via a bleed line 11 to a mixing tank 12 where it is used to form the source of calcium as solution or slurry. That in turn is passed through line 13 to the precipitation unit 9. In this manner, the water balance of the system is more easily controlled and maintained.

A still further modification of the apparatus is shown in Fig. 3. In this case, however, the calcium hydroxide is slurried not with water exiting the ERIX unit via line 5 but with recycled water from the calcium fluoride precipitation unit taken from line 8 through line 14. As noted above, this arrangement reduces the burden on the ERIX unit by reducing significantly the quantity of aqueous fluoride recycled through the ERIX unit. In fact, as shown in Fig. 3, the recycled aqueous fluoride can be cycled entirely past the back surface of the ion exchange material in the ERIX unit so that it is not subjected to the ion exchange process.

Turning now to Fig. 4 of the drawings, there is shown an example of an electrochemical cell suitable for incorporation into the closed loop circulation systems shown in Figs. 1 to 3.

The electrochemical cell 30 shown in Fig. 4 comprises an electrode assembly 11 and an electrode assembly 31 spaced apart by a dividing section 32 which incorporates an inlet port 33 and an outlet port 35 for aqueous solution. The electrode assemblies 11 and 31 and dividing section 32 together

define a solution compartment 37.

The electrode assemblies are separated from the solution compartment by suitable ion permeable membranes, 12 and 13, that allow cations to move into a cathode compartment 34 and anions to move into an anode compartment 14. The anode compartment 14 contains an anode 20 and the cathode compartment 34 contains a cathode 39.

Catholyte solution can be introduced and removed from the cathode compartment 34 through ports 15 and 16 and anolyte solution can be introduced and removed from the anode compartment 14 through ports 18 and 19. The solution compartment 37 is filled with suitable ion exchange material for the anions and cations to be adsorbed.

The aqueous solution of fluoride and ammonium ions passes continuously through the compartment 37 via inlet 33 and outlet 35 and within the cell the ions are adsorbed onto the resin. An electrical potential between the electrodes 20 and 39 causes fluoride ions to be adsorbed on and to pass through the ion exchange layer to membrane 12 and through that membrane into the anode compartment 14, and ammonium ions to be adsorbed on and to pass through the ion exchange layer to membrane 13 and through that membrane into the cathode compartment 34, generating concentrated fluoride and ammonium solutions in the anode and cathode compartments, respectively. Aqueous solution depleted in fluoride ions and ammonium ions flows out of the cell through outlet port 35.

In an example of the method of the invention, carried out using



apparatus as shown in Fig. 2 of the drawings, a waste water feed of 10,000 litres per hour containing 500 ppm fluoride was passed into the ERIX unit which achieved a fluoride removal efficiency of 100%, i.e. the treated water exiting the ERIX unit was free of fluoride ions. 6,300 litres per hour of 1500 ppm calcium hydroxide liquor was passed to the precipitation unit which achieved 100% removal of precipitated solids. 6,300 litres per hour of fluoride containing liquor from the precipitation unit was recycled to the ERIX unit.

CLAIMS:

1. A method for the treatment of an aqueous stream containing both anionic and cationic species, the method comprising the steps of:

5 continuously circulating water through an essentially closed loop incorporating an ion adsorption unit comprising a water permeable layer of an ion adsorbing material;

feeding to the essentially closed loop an aqueous solution containing the anionic and the cationic species;

10 continuously passing the circulating water including the aqueous solution containing the ionic and the cationic species through the ion adsorbing material in the ion adsorption unit while applying an electric potential across the thickness of the layer of ion adsorbing material and removing from the ion adsorption unit more concentrated aqueous solutions  
15 of the separate ionic species;

continuously discharging from the ion adsorption unit the more concentrated aqueous solution of one ionic species;

continuously discharging from the ion adsorption unit the aqueous solution depleted in anionic and cationic species;

20 continuously passing the more concentrated solution of the other ionic species through a reaction unit in which the ionic species reacts to form a water-insoluble solid material;

continuously recycling eluate from the reaction unit to the ion

adsorption unit; and, if necessary,

adding to the closed loop a quantity of water corresponding the quantity of aqueous solution removed from the reaction unit.

5      2.    A method according to claim 1, wherein the anionic species is ammonium and the cationic species is fluoride.

3.    A method according to claim 2, wherein a concentrated aqueous ammonium solution is continuously discharged from the ion adsorption unit.

10

4.    A method according to claim 2 or claim 3, wherein a concentrated aqueous fluoride solution is continuously passed from the ion adsorption unit into a calcium precipitation unit thereby to form  $\text{CaF}_2$ .

15      5.    A method according to claim 4, wherein a source of calcium as a solution or slurry is continuously admitted to the calcium precipitation unit.

6.    A method according to claim 5, wherein the source of calcium is a slurry of calcium carbonate or of calcium hydroxide.

20

7.    A method according to claim 5 or claim 6, wherein depleted aqueous solution continuously discharged from the ion adsorption unit is used to prepare the solution or slurry of calcium.

8. A method according to claim 5 or claim 6, wherein eluate from the calcium precipitation unit is used to prepare the solution or slurry of calcium.

5 9. A method according to any one of claims 4 to 8, wherein the amount of calcium admitted to the calcium precipitation unit is less than the stoichiometric amount for capturing fluoride and wherein the fluoride containing eluate from the precipitation unit is recycled to the ion adsorption unit to combine with the concentrated fluoride solution.

10

10. Apparatus for use in carrying out the method of claim 1, the apparatus comprising:

an essentially closed loop circulation system containing (i) an ion adsorption unit comprising a water permeable zone of an ion adsorbing material and means for enabling an electrical potential to be applied across the  
15 thickness of that zone and (ii) a reaction unit in which one of the anionic and cationic species is rendered substantially insoluble;

a pump for continuously circulating aqueous solution around the closed loop;

20 an inlet for an aqueous solution containing anionic and cationic species to the closed loop circulation system;

an outlet for concentrated aqueous solution of one ionic species from the ion adsorption unit;

an outlet for depleted aqueous solution from the ion adsorption unit;



an outlet for solid from the reaction unit; and  
an inlet for water into the closed loop circulation system.

11. Apparatus according to claim 10, wherein the reaction unit is a calcium  
5 fluoride precipitation unit which comprises an inlet for an aqueous solution or  
slurry of a calcium source, an inlet for concentrated aqueous fluoride solution,  
an outlet for calcium fluoride and an outlet for aqueous fluoride eluate.



12. Apparatus according to claim 11, wherein the inlet for the aqueous  
10 solution or slurry of the calcium source is operatively connected to a mixing  
vessel in which the calcium source is mixed with water.

13. Apparatus according to claim 12, wherein the mixing vessel is  
operatively connected to the outlet for depleted aqueous solution from the ion  
15 adsorption unit.

14. Apparatus according to claim 12, wherein the mixing vessel is  
operatively connected to the outlet for aqueous fluoride eluate from the  
calcium fluoride precipitation unit.

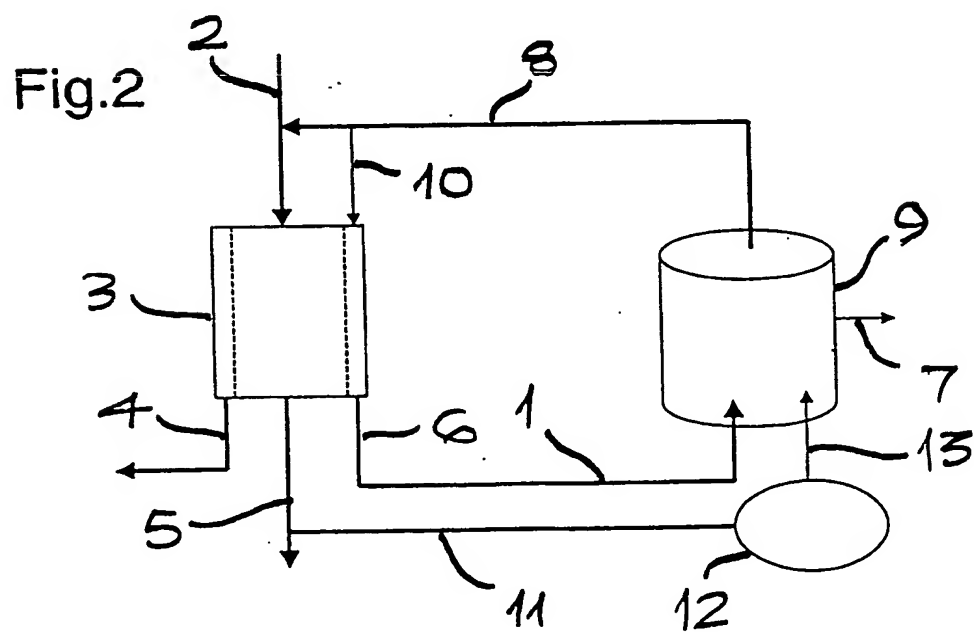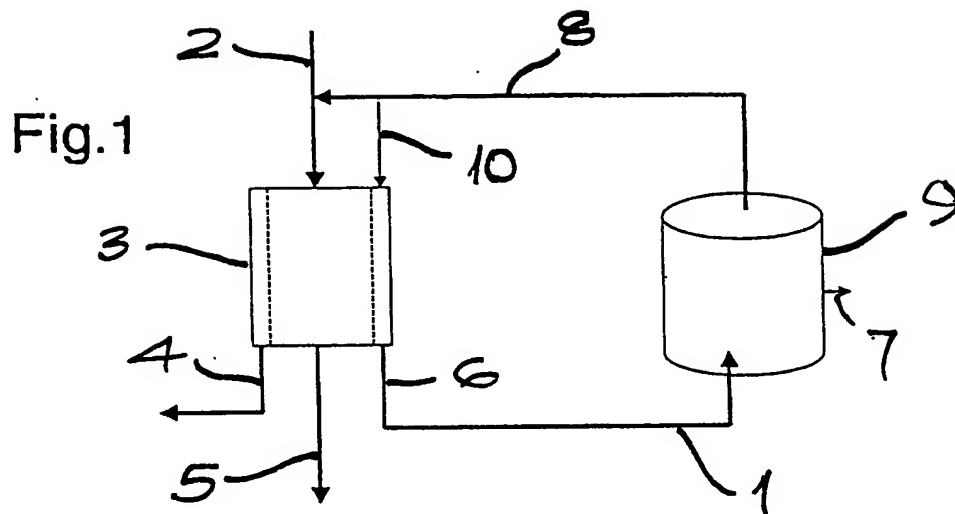

2/2

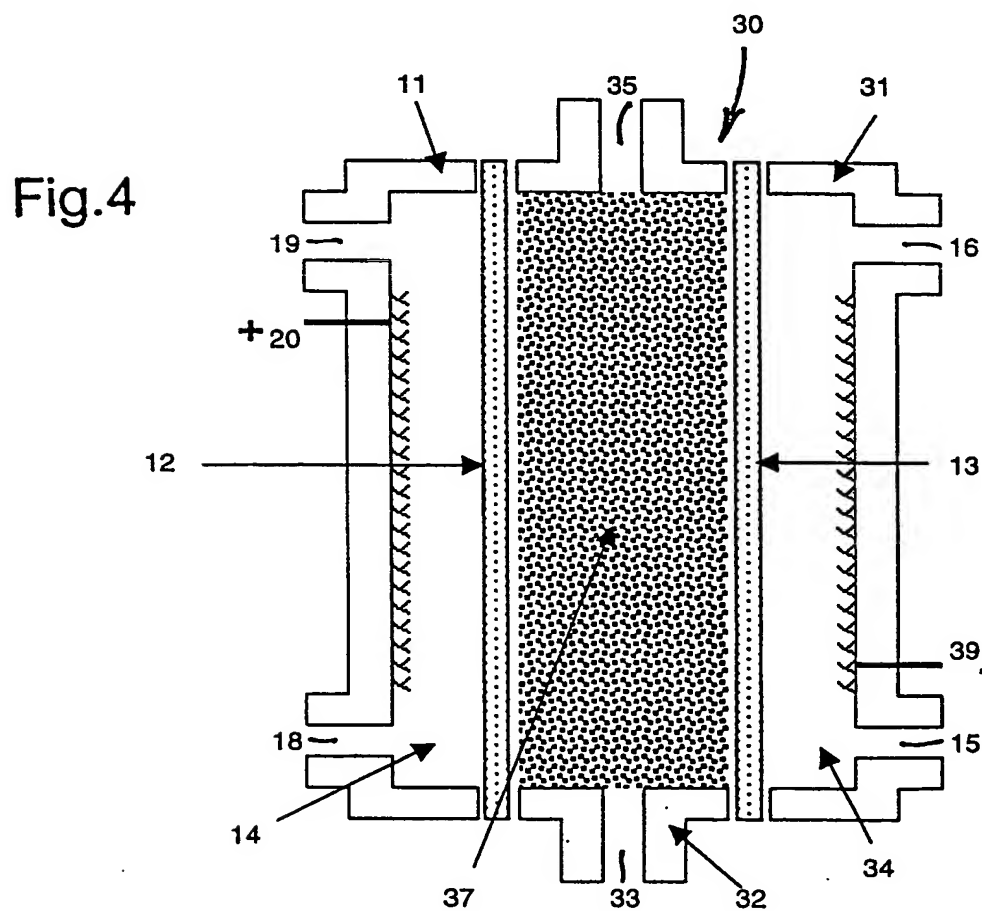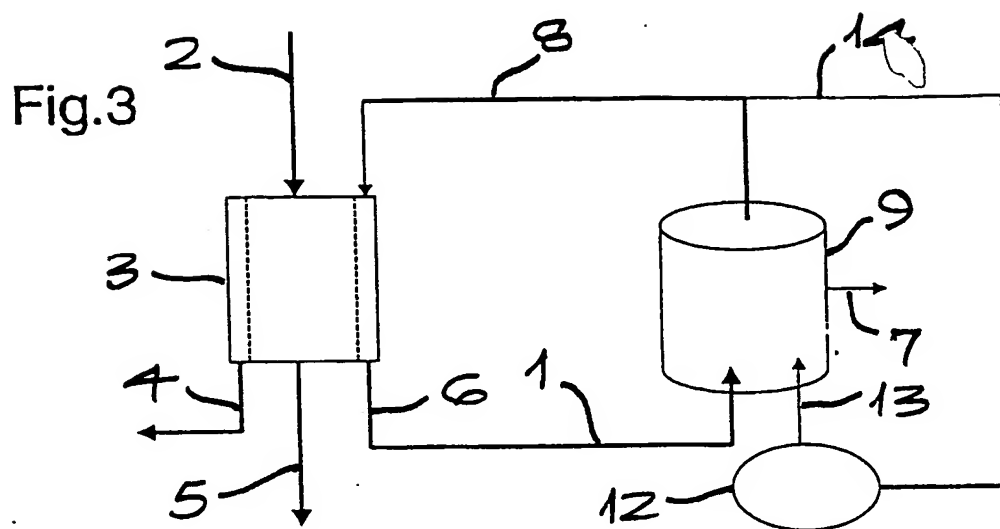

PCT/GB2004/003876





**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**